



5-Port 10/100/1000Mbps Ethernet Switch



S7200-5GE

Key Features:

- Ports:** Provide 5*10/100/1000Mbps Ethernet ports
- Self-adaption:** RJ45 port supports 10/100/1000Mbps Auto MDI/MDIX
- Wide Application:** Designed for Network Security Solution etc
- Surge protection:** Protect the device from lighting surges and others electrical hazards
- Considerate Design:** Desktop with fanless design
- Easy to use:** Plug and play, No configuration required

Gigabit High performance switch

This 5 ports gigabit Switch provides a high-performance switch architecture that is capable of providing the non-blocking switch fabric and wire-speed throughput as high as 16Gbps, which greatly simplifies the tasks of upgrading the LAN for catering to increasing bandwidth demands. Besides, the Flow Control function of the switch enables routers and servers to directly connect to the Switch for fast and reliable data transfer.

All the RJ45 copper interfaces of the S7200-5GE support 10/100/1000Mbps auto-negotiation for optimal speed detection through RJ45 Category 6, 5 or 5e cables. It also supports standard for auto-MDI/MDI-X that can detect the type of connection to any Ethernet device without requiring special straight or crossover cables, providing more than enough bandwidth and stability for ultra high speed data transferring.

Surge Protection Design

Reaching 6KV surge protection, the ports owns the capacity to keep the Switch from lightning strikes and other electrical surges, offering reliable performance even in some harsh environments.

Fanless Design

With its good ventilation design, this switch is able to operate all along without a fan, thus reducing substantial power consumption and creating a noiseless environment. It is definitely the best choice for any working environment without affecting its performance.

S7200-5GE

5-Port 10/100/1000Mbps Ethernet Switch



Technical Datasheet

| Model | SP7200-5G |
|-------------------------|--|
| Hardware Specifications | |
| Connector | 5* 10/100/1000BASE-T RJ45 auto MDI/MDIX ports |
| Processing types | Store and forward |
| LED Display | Power Indicator: PWR(green). Network Indicator: Link(yellow) |
| Thermal Fan | Fanless Design |
| | IEEE802.3i 10 BASE-T |
| | IEEE802.3u 100 BASE-TX |
| Network Standard | IEEE802.3ab/z 1000 BASE-TX |
| | IEEE802.3x Flow Control |
| | IEEE802.3az EEE |
| Switch Architecture | Store and Forward |
| Transmission model | IEEE802.3X full-duplex and Backpressure half-duplex |
| | Backplane bandwidth |
| | 16Gbps |
| Switch Performance | Packet forwarding rate |
| | 7.5Mpps |
| | MAC address |
| | 4k |
| Power requirement | AC100-240V 50/60Hz |
| ESD Protection | 6KV ESD |
| Dimension (W x D x H) | 3.9in x3.0in x 1.0 in. (100 x 76 x 25 mm) |
| Weight | 0.3kg |
| Environment | Operating temperature: -20°C~55°C , operating humidity: 5%~95% Storage temperature: -40°C~75°C , storage humidity: 5%~95% |
| Safety | FCC Part15 Class A,CE,RoHs |


S7200-5GE

5-Port 10/100/1000Mbps Ethernet Switch


Interfaces

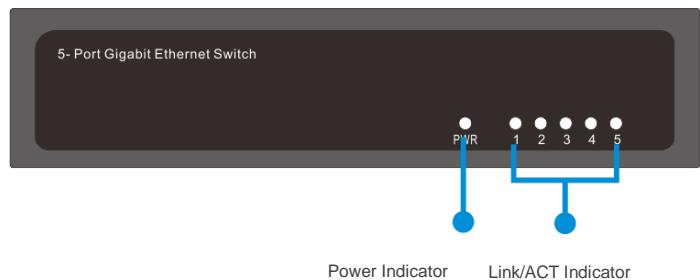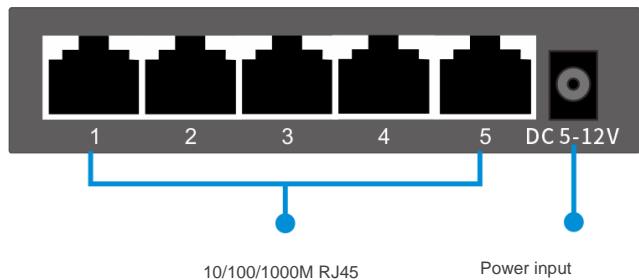

Structure Diagrams

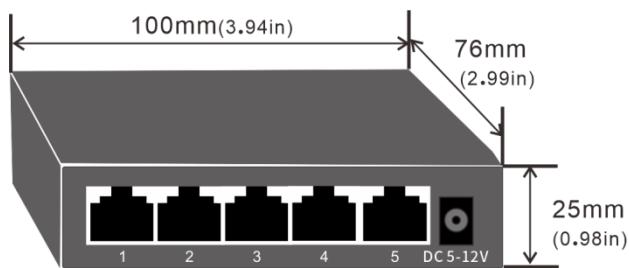

Applications

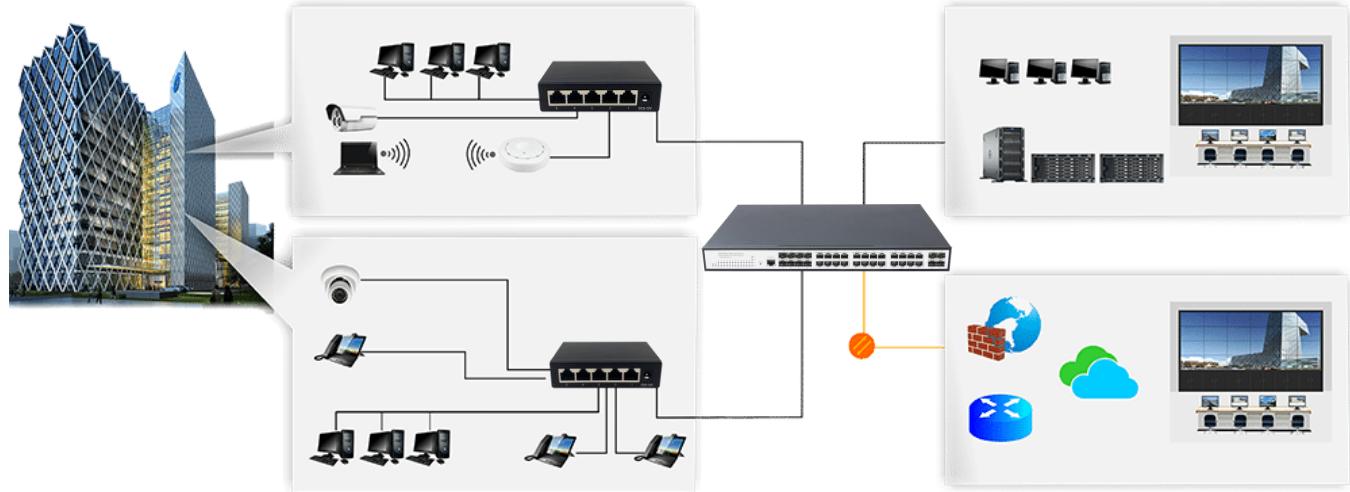

Ordering Information

| | |
|-----------|---|
| S7200-5GE | 5 Ports 10/100/1000Mbps Ethernet Switch ,6KV surge protection |
|-----------|---|