



24-Port 10/100/1000Mbps Switch with 4 1000M Combo Uplink

4Gbps
SFP

Plug & Play

6KV
Lightning Protection



S7200-24GE4GC

Key Features:

Ports: Provide 24*10/100/1000Mbps Ethernet ports with 4*1000M RJ45/SFP Combo Uplink

Self-adaption: RJ45 port supports 10/100/1000Mbps Auto MDI/MDIX

Fiber Port: 4*1.25Gbps SFP Uplink

Wide Application: Designed for Wifi AP and IP Security camera.VoIP etc

Surge protection: Protect the device from lighting surges and others electrical hazards

Easy to use: Plug and play, No configuration required

Installation: Rack mount with easy installation

High performance switch with 4 gigabit Combo Uplink

S7200-24GE4GC

24 ports 10/100/1000Mbps Ethernet Switch with 4 gigabit Combo Uplink


Technical Datasheet

Model	SP7200-24GE4GC	
Hardware Specifications		
Connector	24 10/100/1000BASE-T RJ45 auto MDI/MDIX ports	
Uplink port	4 10/100/1000BASE-T RJ45 auto MDI/MDIX port	
	4 1000 Base-X SFP Slots	
LED Display	Power Indicator: PWR(green).	
	Network Indicator: Link(yellow)	
	SFP: Green	
Thermal Fan	Fanless Design	
Network Standard	IEEE802.3i 10 BASE-T	
	IEEE802.3u 100 BASE-TX	
	IEEE802.3ab/z 1000 BASE-TX	
	IEEE802.3x Flow Control	
	IEEE802.3az EEE	
Switch Architecture	Store and Forward	
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex	
Switch Performance	Backplane bandwidth	64Gbps
	Packet forwarding rate	47.62Mpps
	MAC address	16k
Power requirement	AC100-240V 50/60Hz	
ESD Protection	6KV ESD	
Dimension (W x D x H)	440 x 190 x 45mm (17.32in x 7.48n x 1.75in)	
Weight	< 2.9kg	
Environment	Operating temperature: -20℃~55℃， operating humidity: 5%~95%	
	Storage temperature: -40℃~75℃， storage humidity: 5%~95%	
Safety	FCC Part15 Class A,CE,RoHs	


S7200-24GE4GC

24 ports 10/100/1000Mbps Ethernet Switch with 4 gigabit Combo Uplink


Interfaces

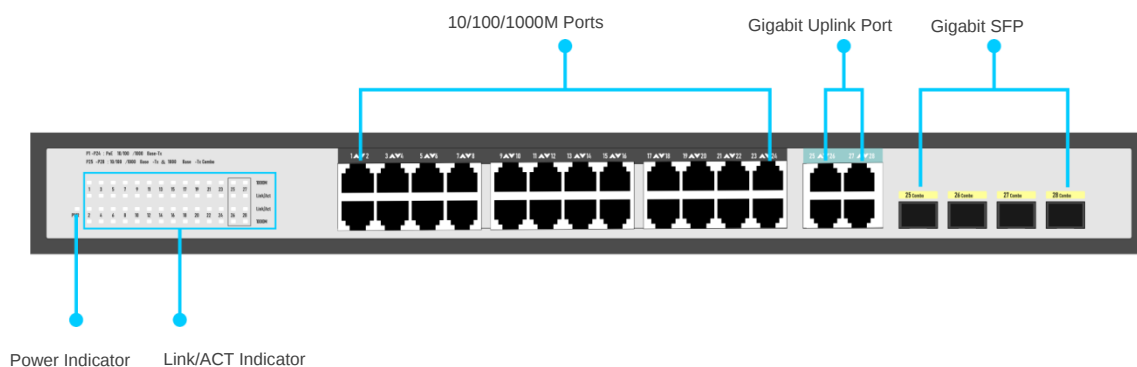

Structure Diagrams

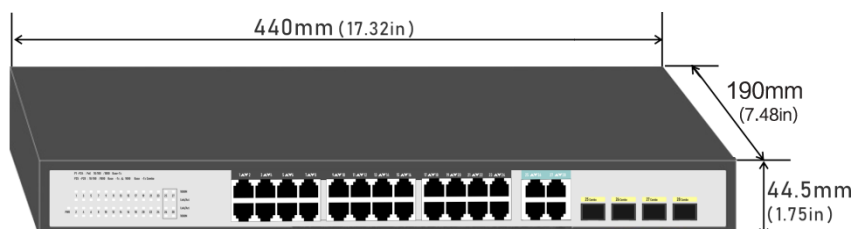

Applications

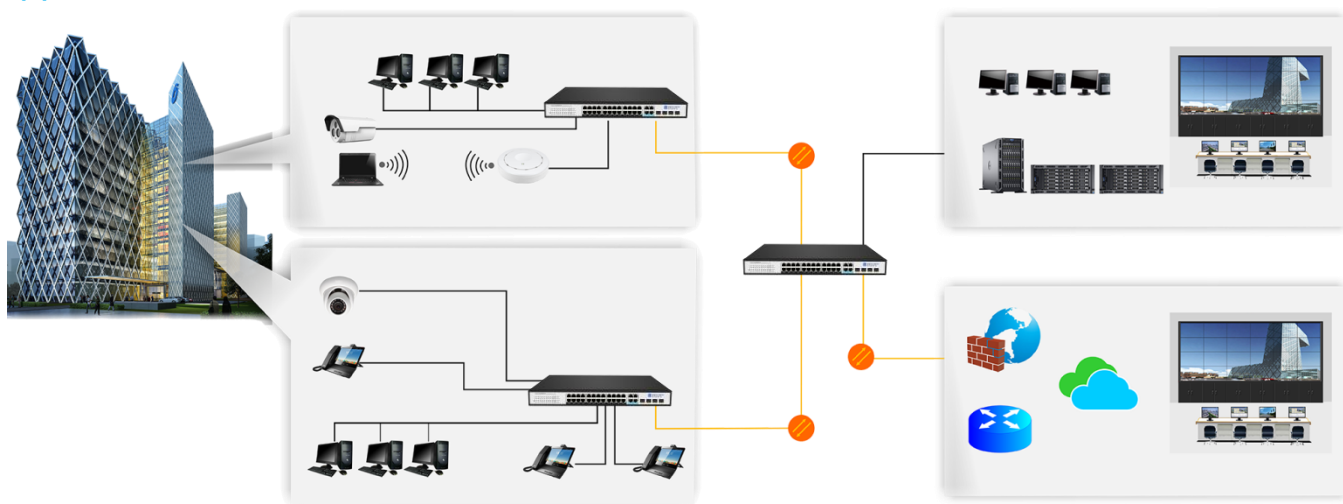

Ordering Information

S7200-24GE4GC

24 Ports 10/100/1000Mbps switch with 4 Gigabit Combo Uplink, 6KV surge protection