



5-Port Boost PoE Switch

DC9~54V Input (12V/24V)

Boost 802.3at PoE Output



IES7211-4PGE1GE-BOS

Key Features:

Ports: Provide 4*Gigabit PoE ports, 1*Gigabit RJ45 Uplink

PoE Standard: IEEE802.3af/at Power over Ethernet (PoE) Compliant Up to 30W

Power Voltage: Ultra wide pressure input DC 9V~54V

Self-adaption: RJ45 port supports 10/100/1000Mbps Auto MDI/MDIX.

Wide Application: Designed for IP security camera, Wifi AP and VoIP etc

Surge protection: Protect the device from lighting surges and others electrical hazards

Working Temperature: -40 to 75 degrees operating temperature

Considerate Design: IP40 Industrial design with dual power input

12V/24V/36V to 54V Boost PoE Conversion

This boost PoE switch features integrated voltage boosting. It accepts ANY 9-54V DC input - harnessing solar panels (12V), vehicle batteries (12V), building power (24V), or industrial systems (36/48/54V) to power it. And output 4-Port 802.3at PoE+.



Up to 30W PoE Output

Delivers up to 30W per port via IEEE 802.3at PoE+ across 4 ports. Powers PoE devices like IP cameras, Wi-Fi 6 APs, and LED boards over a single cable. Reduces wiring complexity and ensures reliable power delivery for surveillance and enterprise networks.

Extreme Environment Ready

This outdoor boost poe switch's IP40 dustproof shield defends against sandstorms. Survives punishing -40°F to 167°F (-40°C to 75°C) swings—from Alaska winters to Arizona summers. No weather downtime on oil rigs, construction sites or remote towers.



IES7211-4PGE1GE-BOS

5-Port Boost PoE Switch, DC 9~54V Input, 802.3at 30W PoE+ Output


Technical Datasheet

Model	IES7211-4PGE1GE-BOS
Hardware Specifications	
Connector	5* 10/100/1000BASE-T RJ45 auto MDI/MDIX ports
PoE Port	4* PoE+ PSE port (Up to 30W)
LED indicators	Power Indicator: PWR(green). Network Indicator: Link/ACT(Yellow) PoE Working Indicator: PoE(green)
Power Connector	Removable 4-pin terminal block Pin 1+/2- for Power 1; Pin 3+/4- for Power 2
Power Requirements	9~54V DC, 6A (max.)
Power Consumption	Max. 3 watts (system on) Max. 120 watts (Full loading)
ESD Protection	Contact Discharge 6KV DC, Air Discharge 8KV DC
Enclosure	IP40 aluminum case
Thermal Fan	Fanless Design
Installation	Din Rail
Dimension(WxDxH)	30mm x 78mm x 95mm(1.18in x 3.07in x 3.74in)
Weight	0.3Kg
Switching Specifications	
Network standard	IEEE802.3i 10 BASE-T IEEE802.3u 100 BASE-TX IEEE802.3ab 1000BASE-T IEEE802.3z 1000BASE-X IEEE802.3x Flow Control
Switch Architecture	Store and Forward
Backplane bandwidth	10Gbps
Packet forwarding rate	7.44Mpps
MAC address	2k
Shared Data Buffer	4.1 megabits
Jumbo Frame	10 Kbytes
Flow Control	IEEE802.3X full-duplex and Backpressure half-duplex
Environment	
Safety	FCC Part15 Class A,CE,RoHs
Stability Testing	IEC 60068-2-32 (free fall) IEC 60068-2-27 (shock) IEC 60068-2-6 (vibration)
Environment specification	Operating temperature: -40℃~75℃, operating humidity: 5%~95% Storage temperature: -40℃~75℃, storage humidity: 5%~95%


Power over Ethernet (PoE) Specifications

PoE Standard	IEEE 802.3af Power over Ethernet/PSE IEEE 802.3at Power over Ethernet Plus/PSE
PoE Supply Type	1/2 (+), 3/6 (-)
PoE Power Output	IEEE 802.3af Standard Per port 48V~51V DC, max. 15.4 watts IEEE 802.3at Standard Per port 51V~54V DC, max. 30 watts
PoE Power Budget	DC 12V input: PoE Output Total Budget: 70W DC 24V~54V input: PoE Output Total Budget: 120W

Interface indication

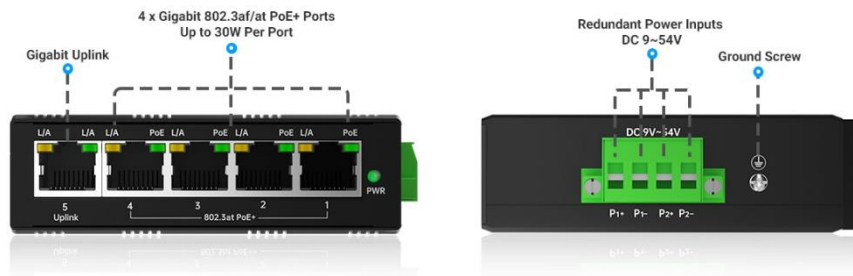

Application

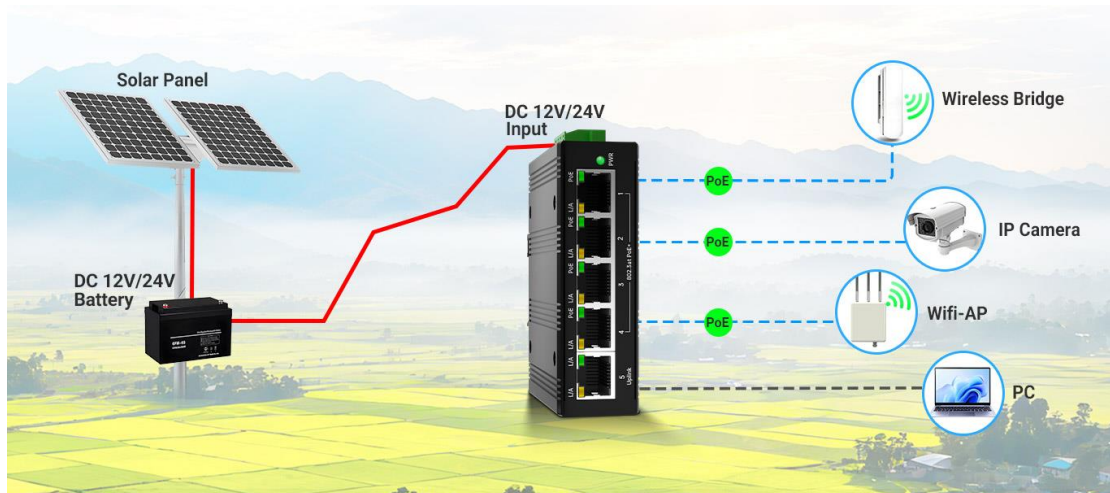

Ordering Information

IES7211-4PGE1GE-BOS	5 Ports 10/100/1000Mbps boost PoE switch, IEEE802.3af/at, DC9~54V Input, 6KV surge protection, DIN-Rail Mount
---------------------	---

Shenzhen Benchu Group Technology Limited

5F,Block5,GuangmingGu Industrial Park,Matian Villiage,
Guangming Disitrect,Shenzhen,China

Tel:+86-755 23246531 Email: sales@benchu-group.com

www.benchu-group.com



IES7211-4PGE1GE-BOS

Benchu group reserves the right to change specifications without prior notice.

All brand names and trademarks are property of their respective owners.

Copyright © 2020 Benchu Technology Corp. All rights reserved.